



# Xprinter: Thermal Receipt Printer Installation Guide (Windows XP 32-bit)

Thank you for purchasing the USBSwiper Thermal Receipt Printer for Windows XP 32-bit Operating Systems.

This installation guide will walk you through the necessary steps in order to install this printer properly on your system and use with USBSwiper™ software.

As always, if you have any questions please call our Technical Support Team @ (816)332-6545.

## Step One: Unpacking your Xprinter Thermal Receipt Printer

1. Unpack your printer and save the packaging materials.
2. Make sure you have the following items below.
  - Printer
  - Power adapter
  - Power cord
  - USB to DB25 adapter cable


## Step Two: Connecting your Xprinter Thermal Receipt Printer

1. Plug the power cord into the power adapter.
2. Plug the power adapter into the printer.
3. Plug the other end into a power outlet.
4. Plug the USB adapter cable into the printer and tighten the screws.
5. Plug the other end of the USB adapter into an available USB port on your computer.


## Step Three: Installing the Software

1. Close all running applications.
2. Verify you're running a 32-bit machine and not a 64-bit machine.
  - Go to the Start Menu > Right-click on My Computer
  - Under the General tab, it will say Microsoft Windows XP Professional.
3. Go to [www.usbswiper.com/download](http://www.usbswiper.com/download) and click on the 32-bit link next to Xprinter Drivers link.


When asked to Open or Save File, Select Save File and Click OK.

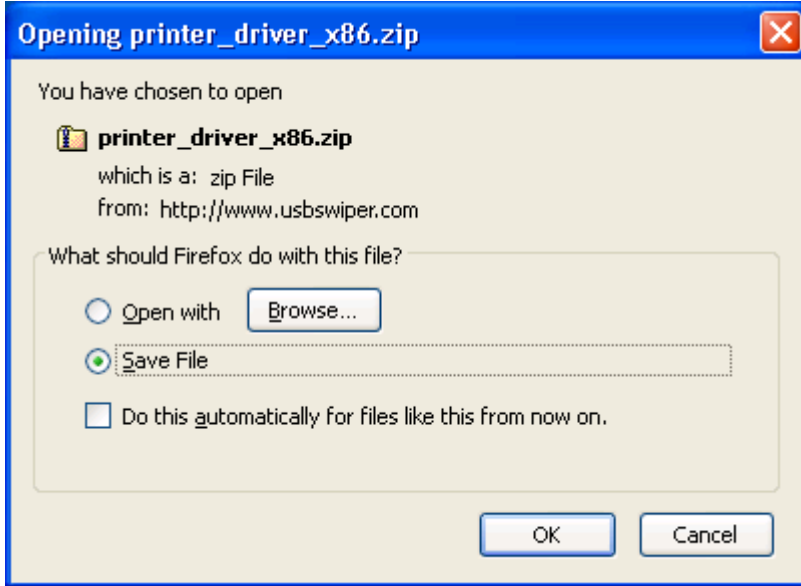


Once the download is complete, open the Zip Folder named printer\_driver\_x86 from its saved location.

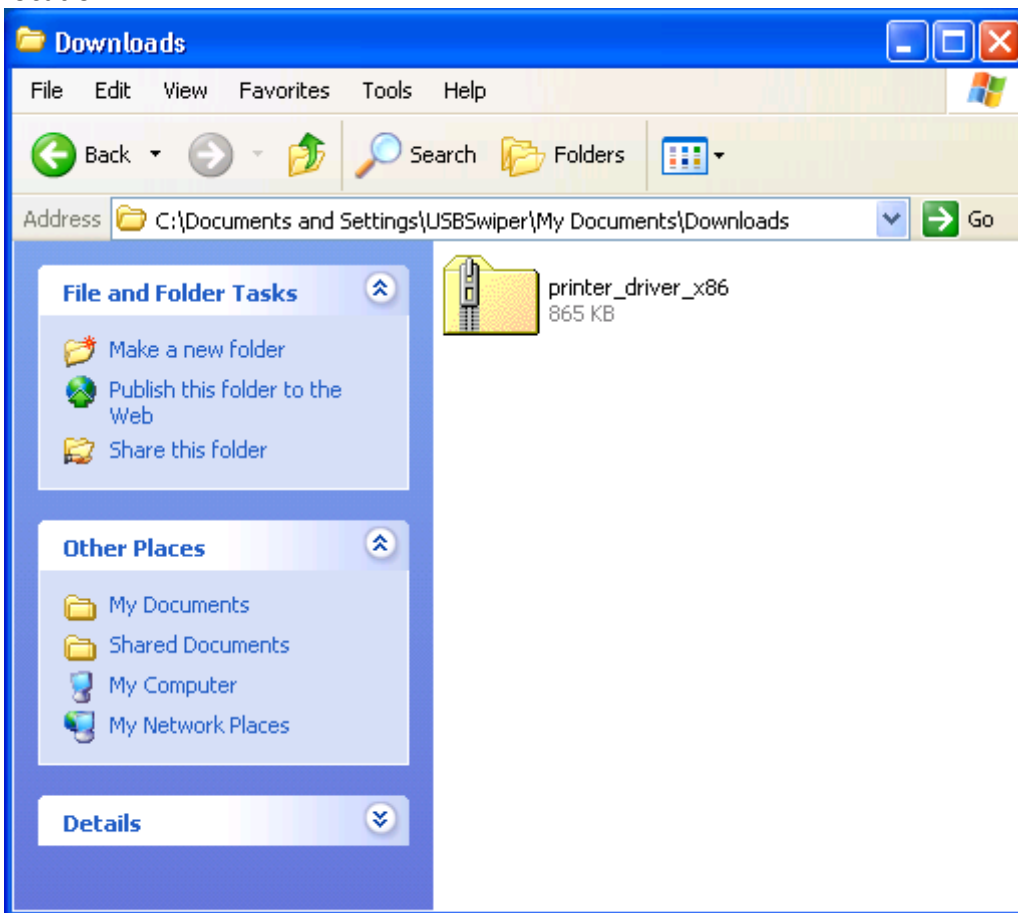


Click on Extract all files, from the Folder Tasks on the left to begin the Extraction Wizard.

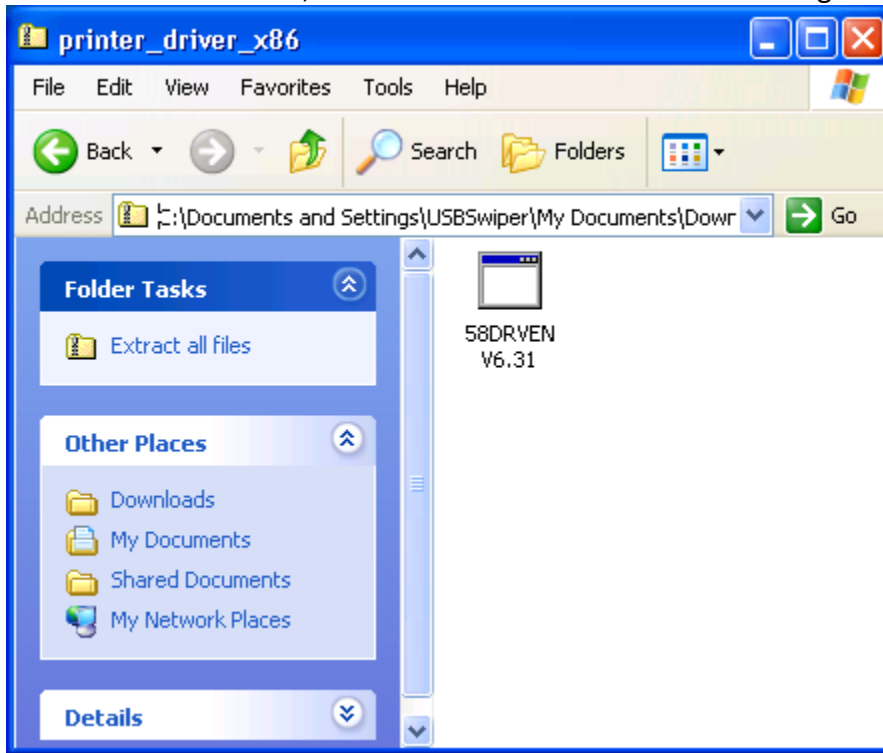


The Extraction Wizard will guide you through extracting the files from the zip folder. Click Next.

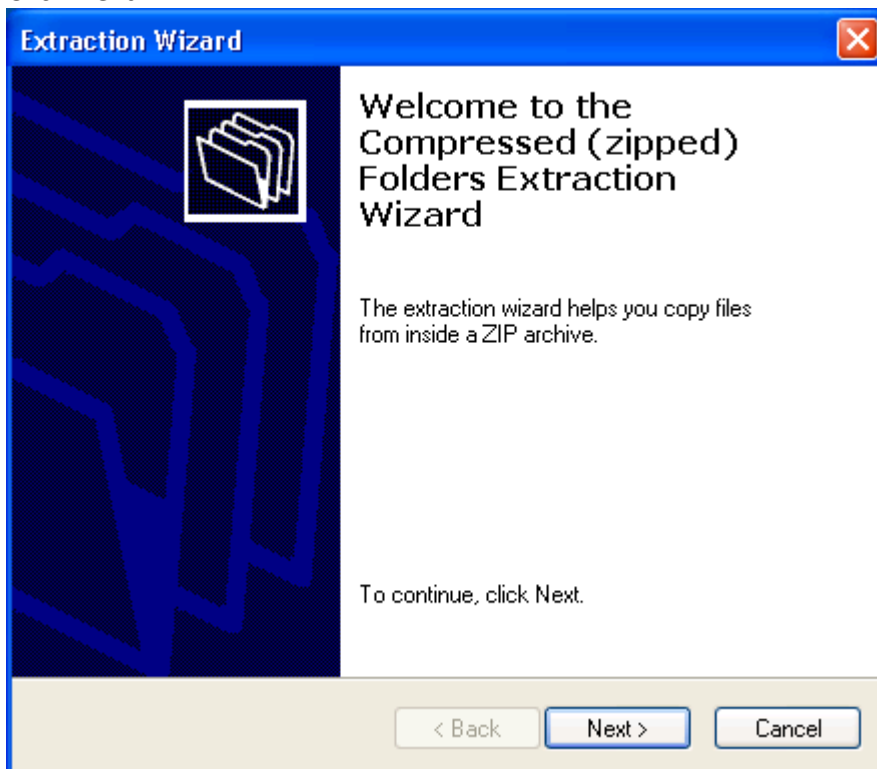


Click Next.

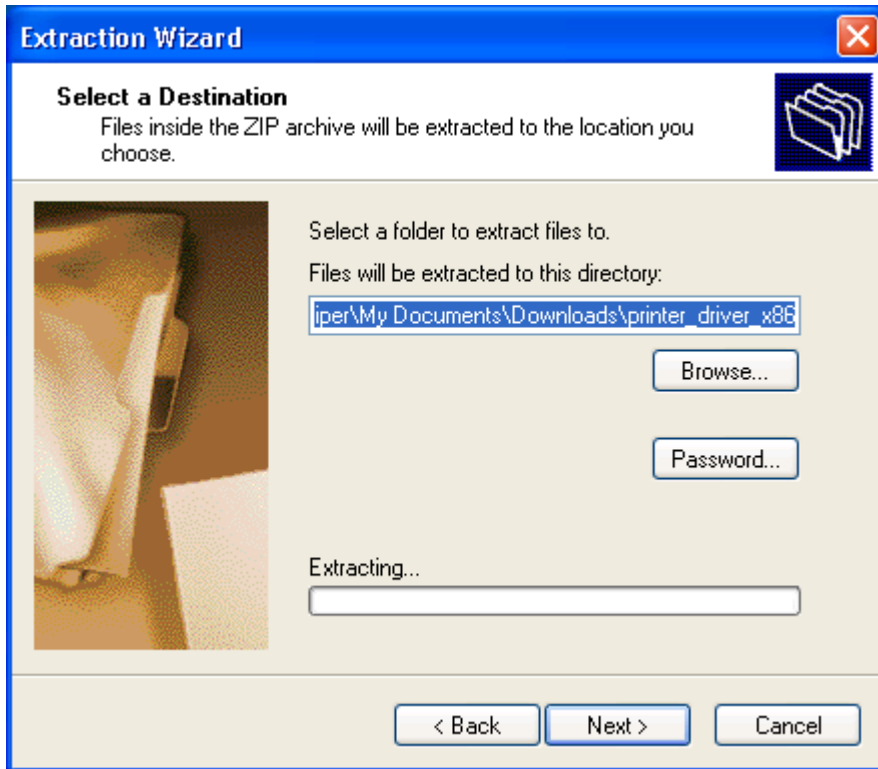


Click Finish.

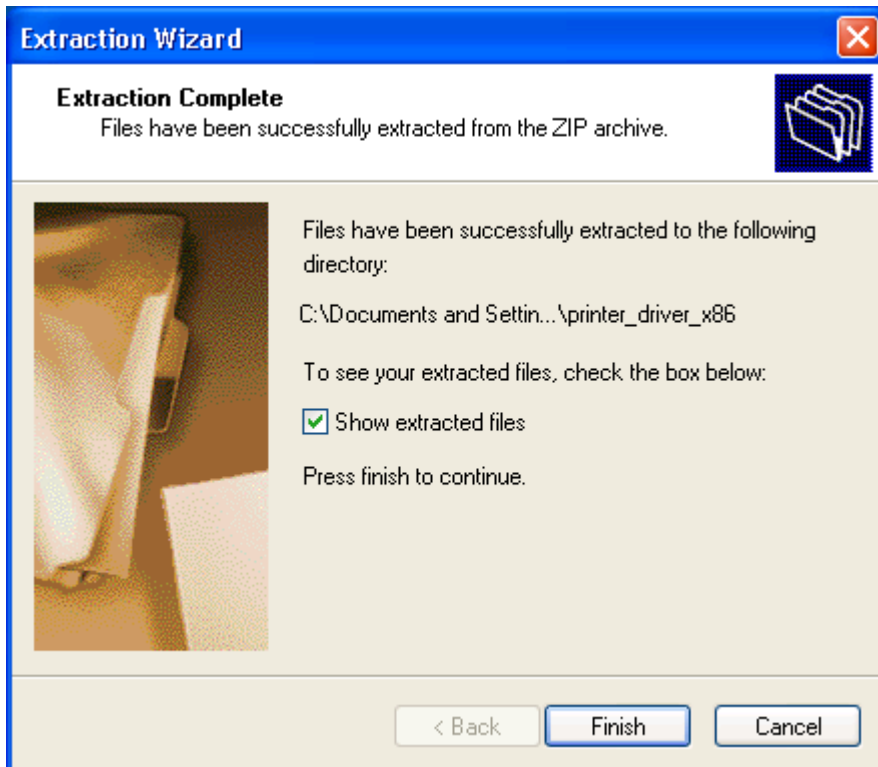


Once all files have been extracted, double-click on 58DRVEN V6.31 to begin the Setup Wizard.

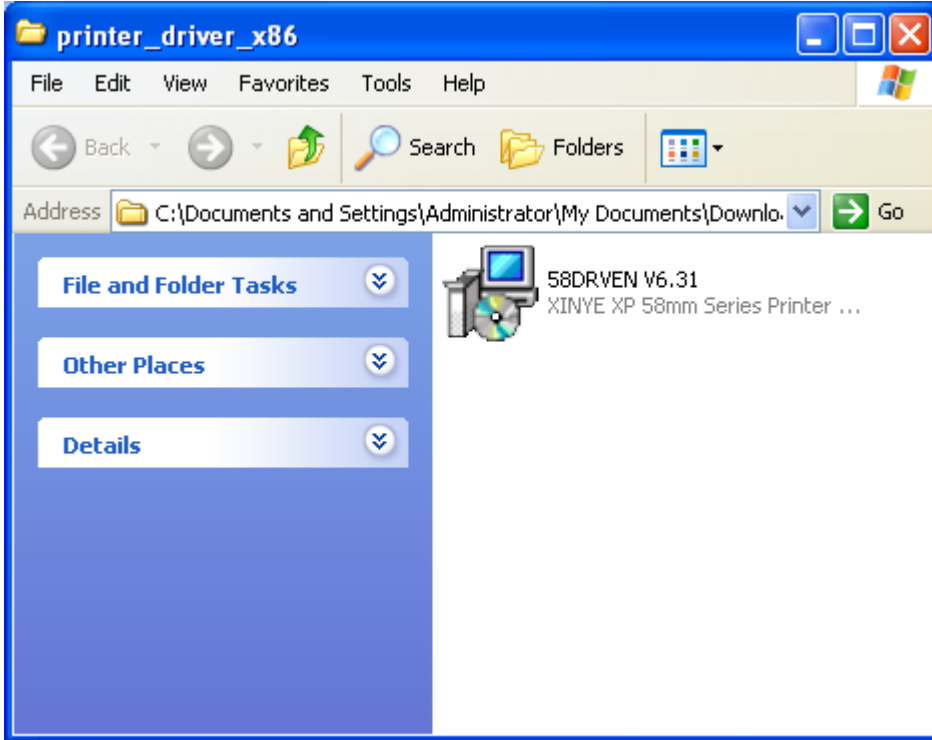


The Setup Wizard will guide you through installing the Xprinter drivers. Click Next.

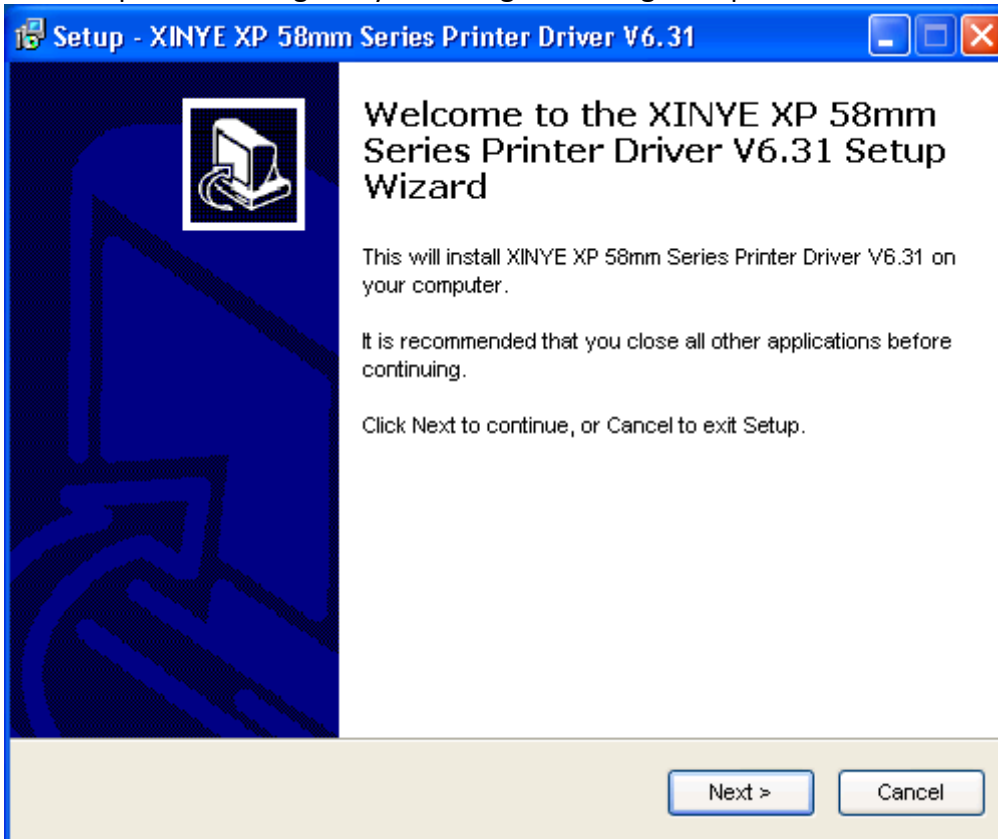

Read the License Agreement. If you agree, select “I accept the agreement” and click Next.

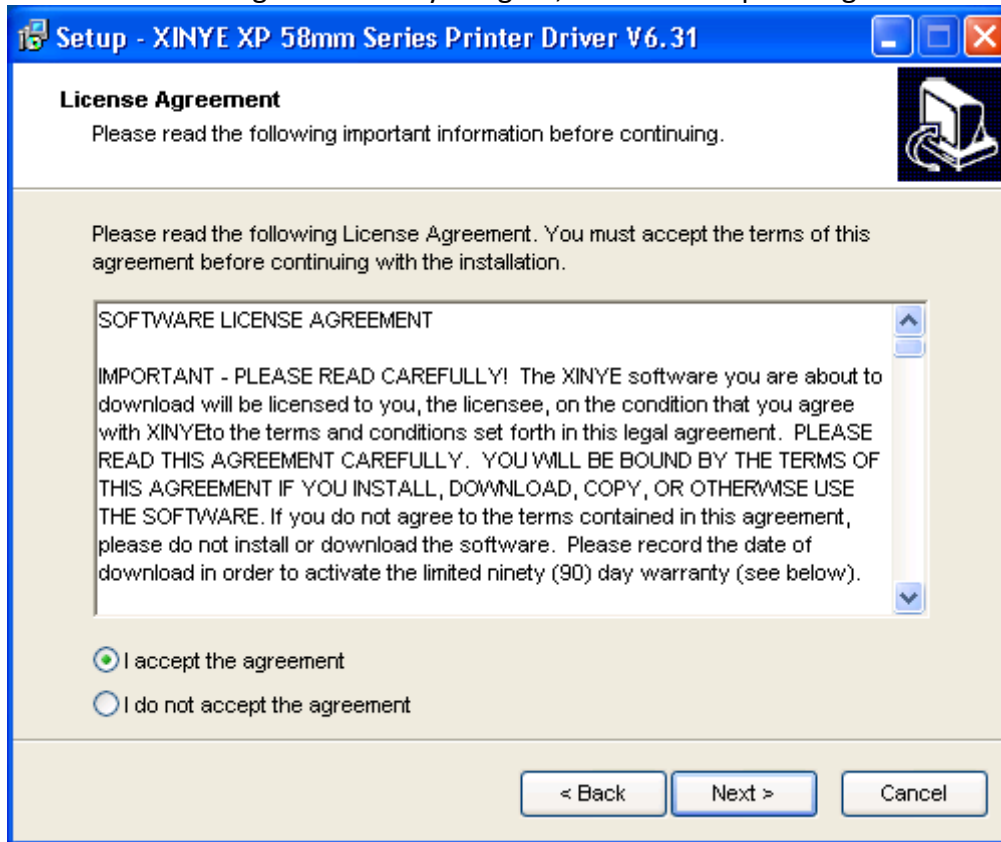


Click Next.

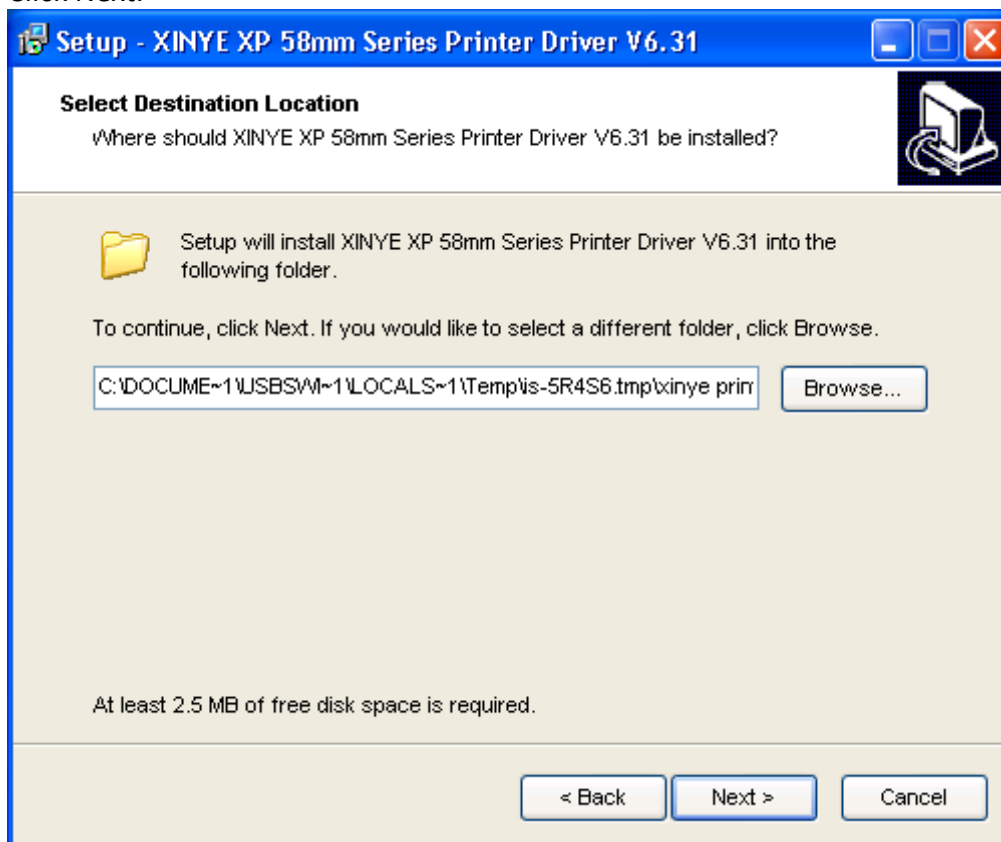




Click Install.

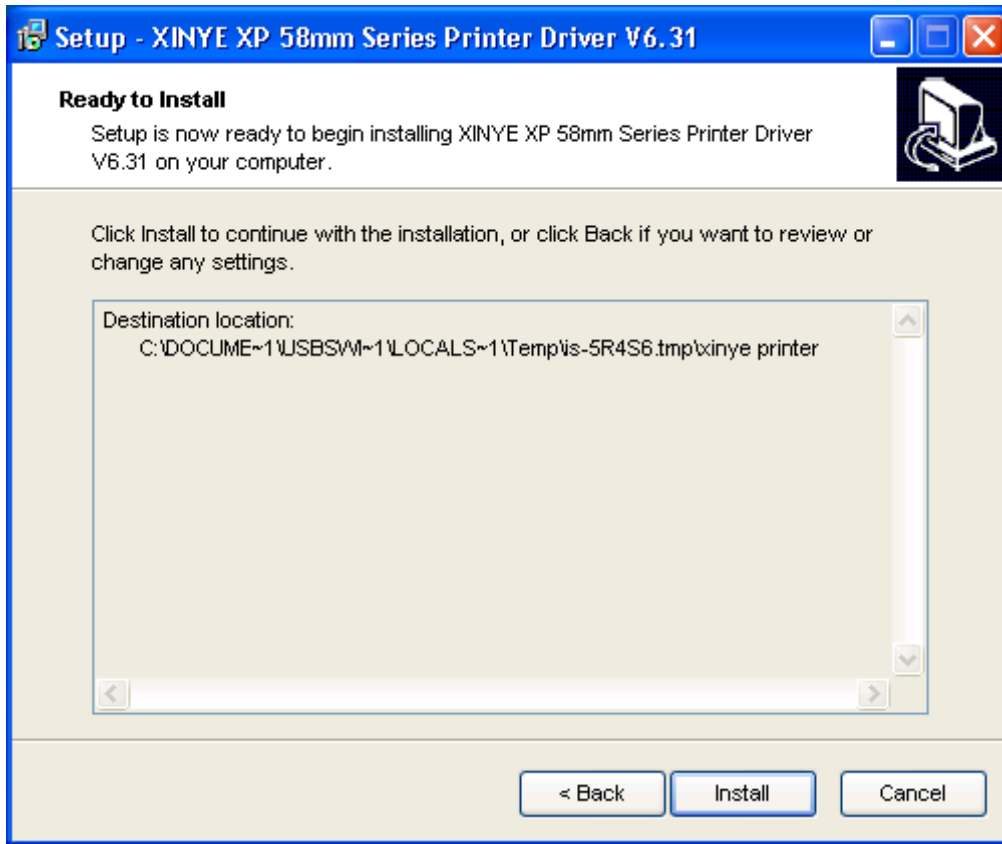

Windows XP will be the default. Click Next.

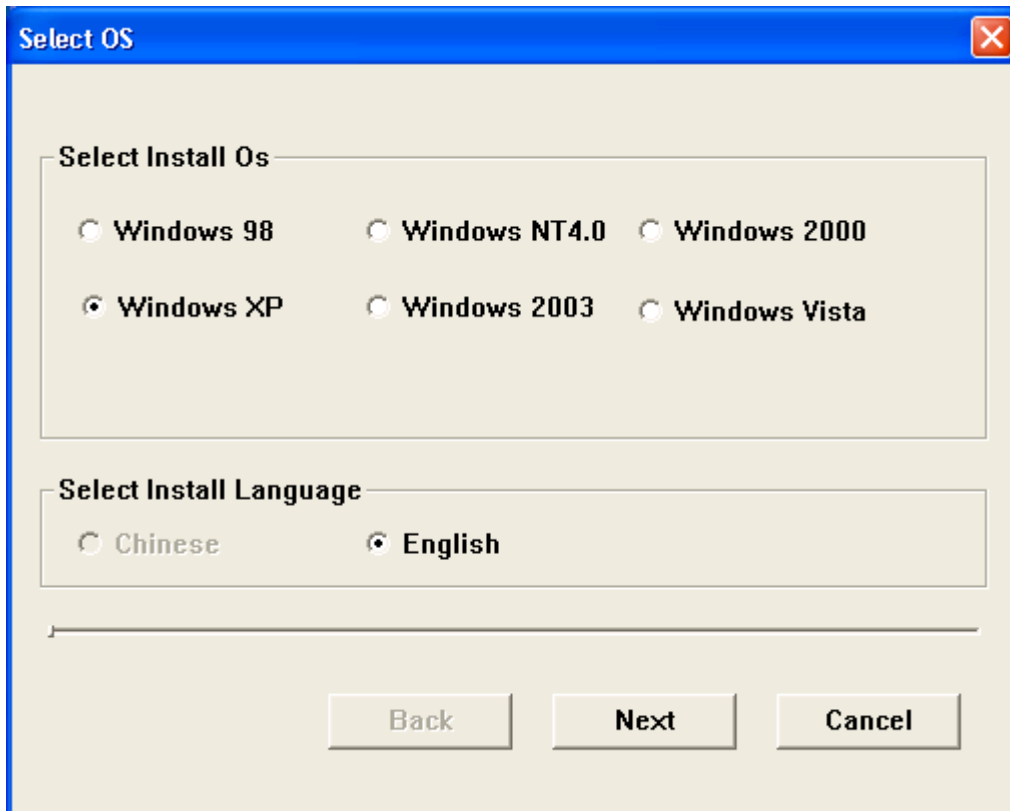



Leave all Detail Settings and Click OK. We will change the printer name and port later.

The "Detail Setting" dialog box is shown with a blue title bar and a close button in the top right corner. It contains the following settings:

- Install Module:** A dropdown menu set to "XP-58IIA Series".
- Printer Setting:** A section with a checked checkbox "Set Default Printer" and a text field "Name:" containing "XP-58IIA Series".
- Printer Port Setting:** A section with a "Ports" dropdown set to "LPT1", and three pairs of dropdown menus: "BaudRate" (9600), "StopBits" (1), "FlowControl" (Hardware), "ByteSize" (8), and "Parity" (None).
- Buttons:** "Back", "OK", and "Cancel" buttons are located at the bottom.

Click Finish.


The "Setup - XINYE XP 58mm Series Printer Driver V6.31" dialog box is shown with a blue title bar and standard window controls. It contains the following text and elements:

- Icon:** A printer icon in a square frame on the left side.
- Title:** "Completing the XINYE XP 58mm Series Printer Driver V6.31 Setup Wizard".
- Text:** "Setup has finished installing XINYE XP 58mm Series Printer Driver V6.31 on your computer." and "Click Finish to exit Setup.".
- Button:** A "Finish" button is located at the bottom center.




## Step Four: Change Printer Port

Go to the Start Menu > Printers & Faxes. Right click on XP-58IIA and go to Properties.

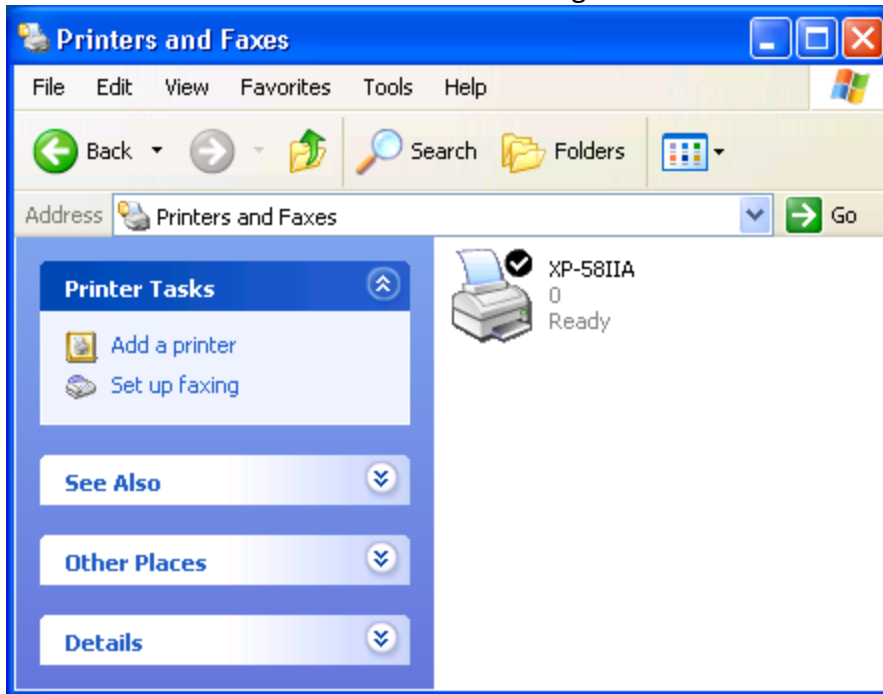


Rename the printer, if you wish.

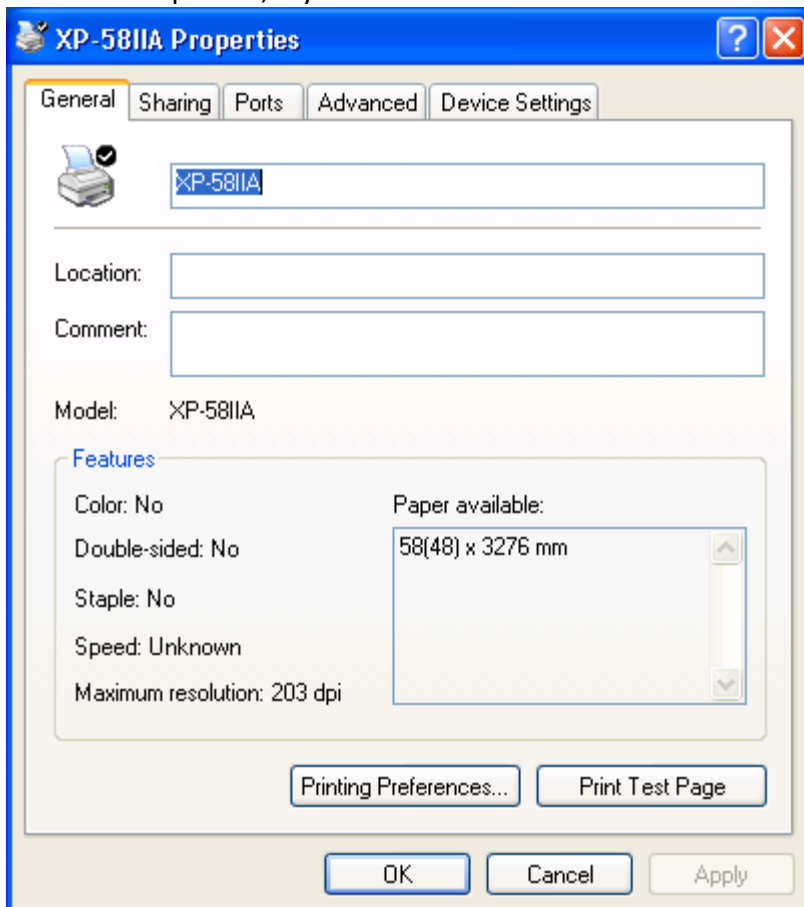




Select the Ports Tab and select the USB001 Virtual Printer Port for USB. Click Apply.  
\*Do not close the window. Go to Step Five.

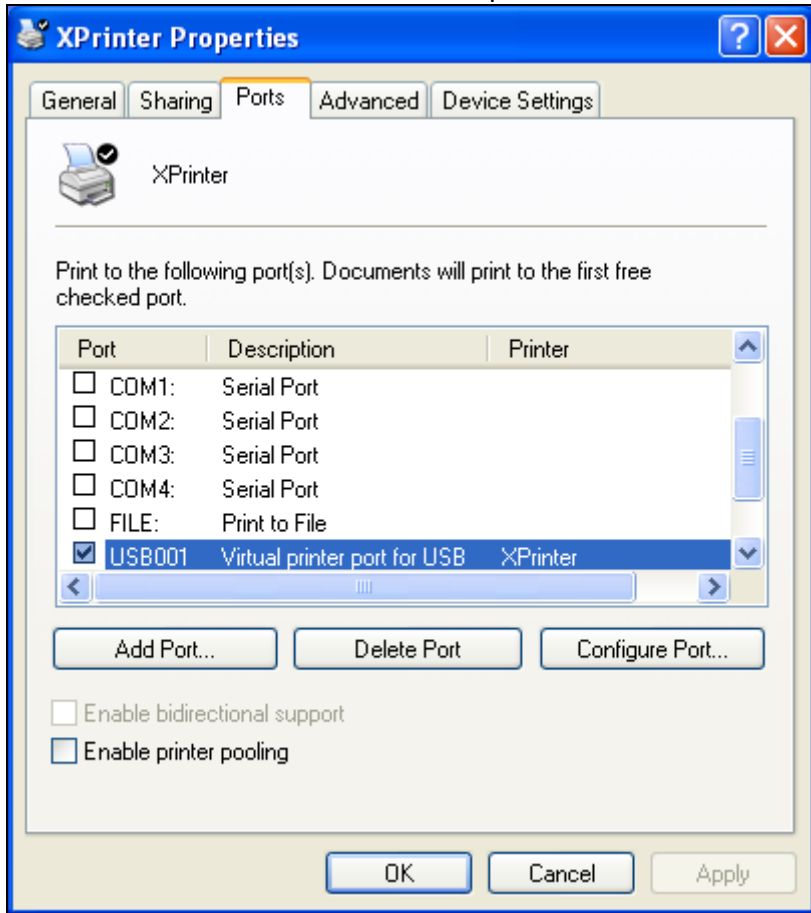

## Step Five: Test Xprinter Thermal Receipt Printer

From the Properties Window, select the General Tab and Click Print Test Page.

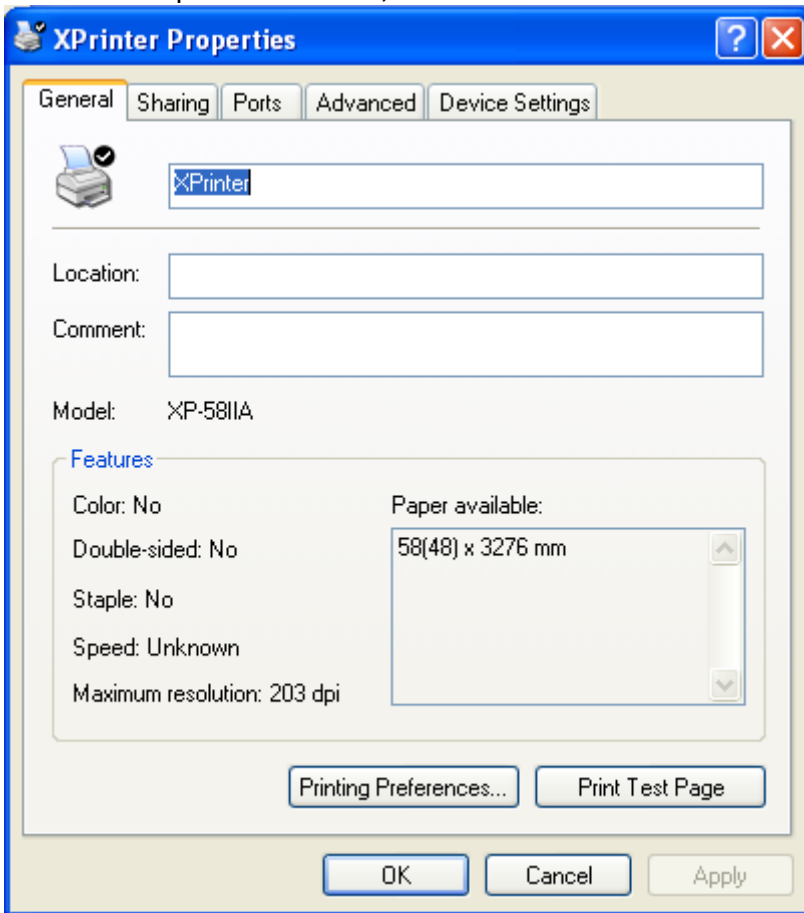

Once the Test Page has printed, you're now ready to print credit card receipts from USB Swiper!

If you have any general questions, please email [support@usbswiper.com](mailto:support@usbswiper.com) or if you need to schedule a session to complete the installation, please call our Technical Support Team @ (816)332-6545.

Thanks again for choosing USB Swiper!